


Ball valves ONYX

Nickel plated full-port ball valve with nut on stem and steel lever (female-female version)

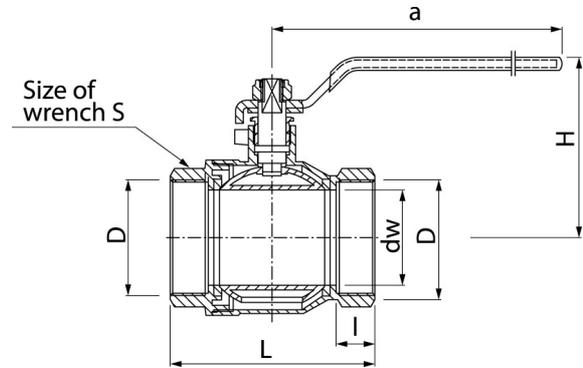

| DN | Code | Dimensions | | | | | | | | EAN13 |
|-----|---------|------------|--------|----|----|-----|-----|-----|-----|---------------|
| | | Size | D | I | dw | L | a | H | S | |
| 65 | 9007930 | 2 1/2" | G2 1/2 | 24 | 62 | 136 | 236 | 110 | 82 | 5907451936931 |
| 80 | 9007920 | 3" | G3 | 26 | 74 | 150 | 236 | 119 | 93 | 5907451936924 |
| 100 | 9007910 | 4" | G4 | 28 | 85 | 172 | 240 | 136 | 120 | 5907451936917 |

Product usage:

In cold and hot water systems and central heating systems as shut off valves

Type:

Straight ball valves

Technical data/Operating parameters:

Max pressure: 1,6 MPa,
Max temperature: 95°C

Guarantee:

25-year

Used materials:

body, nut, ball, stem, adjustable stem nut: brass;
ball and stem seal: PTFE (teflon);
lever: carbon steel with plastic coating

Finish:

body, nut: nickel; ball: chrome