

VALVEXTM
Power of Quality

ONYX
valve

PN 40
180°C




NICKEL
free

POWER OF
QUALITY





ONYX Full-port ball valve with nut on stem and steel lever (female-female version)

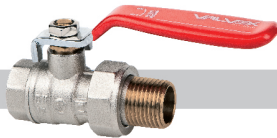

ONYX Full-port ball valve with nut on stem, with tail piece and steel lever



ONYX Full-port ball valve with nut on stem and steel lever (female-male version)

CODE	P nom. / max temp.	SIZE
1451320	PN40, 180°C	3/8"
1452320	PN40, 180°C	1/2"
1453320	PN40, 180°C	3/4"
1454320	PN40, 180°C	1"
1455320	PN30, 180°C	1 1/4"
1456320	PN30, 180°C	1 1/2"
1457320	PN30, 180°C	2"

CODE	P nom. / max temp.	SIZE
1452420	PN40, 180°C	1/2"
1453420	PN40, 180°C	3/4"
1454420	PN40, 180°C	1"

CODE	P nom. / max temp.	SIZE
1451460	PN40, 180°C	3/8"
1452460	PN40, 180°C	1/2"
1453460	PN40, 180°C	3/4"
1454460	PN40, 180°C	1"
1455460	PN30, 180°C	1 1/4"
1456460	PN30, 180°C	1 1/2"
1457460	PN30, 180°C	2"



ONYX Full-port ball valve with nut on stem and aluminium butterfly handle (female-female version)



ONYX Full-port ball valve with nut on stem, with tail piece and aluminium butterfly handle




ONYX Full-port ball valve with nut on stem and aluminium butterfly (female-male version)


CODE	P nom. / max temp.	SIZE
1452400	PN40, 180°C	1/2"
1453400	PN40, 180°C	3/4"
1454400	PN40, 180°C	1"

CODE	P nom. / max temp.	SIZE
1452440	PN40, 180°C	1/2"
1453440	PN40, 180°C	3/4"
1454440	PN40, 180°C	1"

CODE	P nom. / max temp.	SIZE
1451480	PN40, 180°C	3/8"
1452480	PN40, 180°C	1/2"
1453480	PN40, 180°C	3/4"
1454480	PN40, 180°C	1"



ONYX Full-port ball valve with nut on stem and steel lever (male-male version)




ONYX Full-port ball valve with nut on stem and aluminium butterfly handle (male-male version)

VALVEXTM
Power of Quality


Valvex S.A., ul. Nad Skawą 2, 34-240 Jordaków, Poland
tel. +48 18 269 32 20, 269 32 49, fax +48 18 269 32 11
e-mail: valvex@valvex.com

CODE	P nom. / max temp.	SIZE
1452470	PN40, 180°C	1/2"
1453470	PN40, 180°C	3/4"
1454470	PN40, 180°C	1"

CODE	P nom. / max temp.	SIZE
1452430	PN40, 180°C	1/2"
1453430	PN40, 180°C	3/4"
1454430	PN40, 180°C	1"

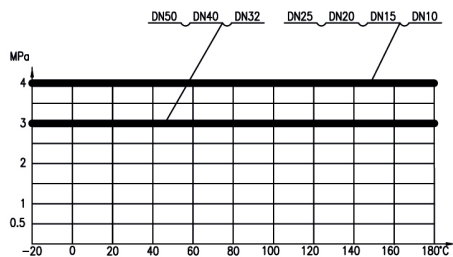

operating characteristic

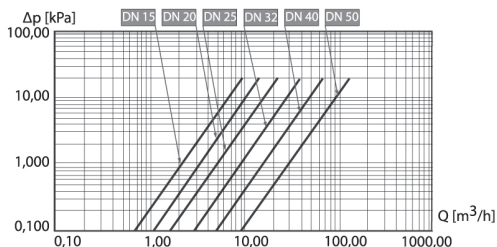

flow rate