

ORO valve

PN 16
120°C

POWER OF
QUALITY





ORO Ball valve with nut on stem and steel lever (female-female version)



ORO Ball valve with nut on stem and steel lever (female-male version)



ORO Ball valve with nut on stem, with tail piece and aluminium butterfly handle

CODE	PARAMETERS	DIMENSIONS
1472600	PN16,120°C	1/2"
1473600	PN16,120°C	3/4"
1474600	PN16,120°C	1"
1475600	PN16,120°C	1 1/4"
1476600	PN16,120°C	1 1/2"
1477600	PN16,120°C	2"

CODE	PARAMETERS	DIMENSIONS
1472640	PN16,120°C	1/2"
1473640	PN16,120°C	3/4"
1474640	PN16,120°C	1"

CODE	PARAMETERS	DIMENSIONS
1472680	PN16,120°C	1/2"
1473680	PN16,120°C	3/4"
1474680	PN16,120°C	1"



ORO Ball valve with nut on stem and aluminium butterfly handle (female-female version)




ORO Ball valve with nut on stem and aluminium butterfly handle (female-male version)

CODE	PARAMETERS	DIMENSIONS
1472620	PN16,120°C	1/2"
1473620	PN16,120°C	3/4"
1474620	PN16,120°C	1"

CODE	PARAMETERS	DIMENSIONS
1472660	PN16,120°C	1/2"
1473660	PN16,120°C	3/4"
1474660	PN16,120°C	1"

VALVEXTM
Power of Quality

Valvex S.A., ul. Nad Skawą 2, 34-240 Jordanów, Poland
tel. +48 18 269 32 20, 269 32 49, fax +48 18 269 32 11,
e-mail: valvex@valvex.com

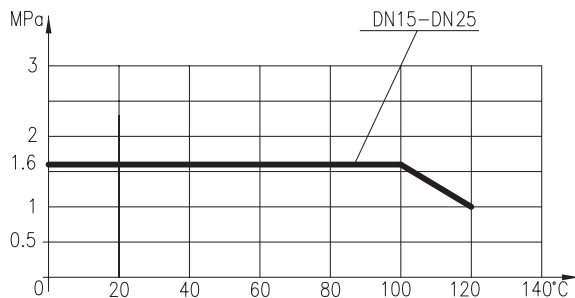

**Operating characteristic
of ORO PN 16 valves**