


Gas quick coupling V-GAS

Flexible gas hose in PVC cover, with quick coupling valve

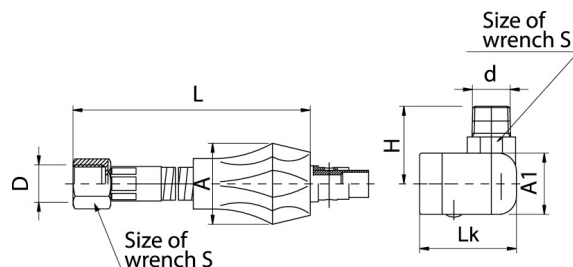

| Code | Dimensions | | | | | | | | | EAN13 |
|---------|------------|-------|------|------|----------------|----|----|----|----|---------------|
| | Size | D | d | L | l _k | A | A1 | H | S | |
| 3901600 | L=500 | Rp1/2 | R1/2 | 500 | 54,5 | 46 | 34 | 43 | 24 | 5907451943878 |
| 3901610 | L=750 | Rp1/2 | R1/2 | 750 | 54,5 | 46 | 34 | 43 | 24 | 5907451944752 |
| 3901620 | L=1000 | Rp1/2 | R1/2 | 1000 | 54,5 | 46 | 34 | 43 | 24 | 5907451948262 |
| 3901630 | L=1250 | Rp1/2 | R1/2 | 1250 | 54,5 | 46 | 34 | 43 | 24 | 5907451952290 |
| 3901640 | L=1500 | Rp1/2 | R1/2 | 1500 | 54,5 | 46 | 34 | 43 | 24 | 5907451942352 |
| 3901650 | L=2000 | Rp1/2 | R1/2 | 2000 | 54,5 | 46 | 34 | 43 | 24 | 5907451966686 |

Product usage:

For use in gas installations in buildings

Type:

Gas quick couplings

Guarantee:

5-year

Technical data/Operating parameters:

MOP 0,5; DN 15

Used materials:

internal hose and braiding: stainless steel;
external cover: PVC;
quick coupling valve: valve body,
seat, disc, cover, stem: brass;
stem, mesh, spring: stainless steel;
sealings: NBR rubber.

Finish:

braiding: stainless steel;
valve body: chrome