


Ball valves ONYX

Ball valve with nut on stem, with tail piece and steel lever

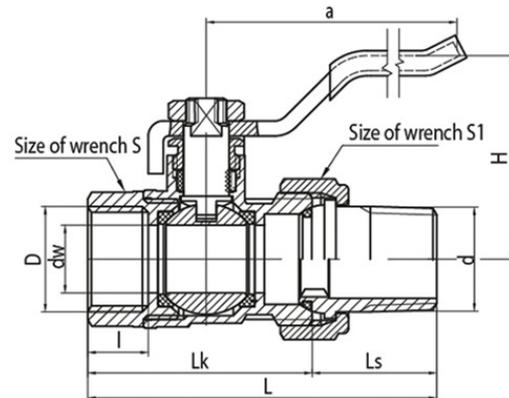

DN	Code	Dimensions											EAN13
		Size	D	l	dw	L	Lk	d	a	H	S	S1	
15	1452420	1/2"	G1/2	12	13,5	69	44,5	R1/2	90	42	25	30	5907451933169
20	1453420	3/4"	G3/4	12	18,5	77,5	55	R3/4	90	46	31	37	5907451933237
25	1454420	1"	G1	14,5	23,5	88,5	58,5	R1	110	50	38	46	5907451933305

Product usage:

In the water supply systems for hot and cold water, heating systems, solar systems with glycol water solution as shut-off valves to open and close the flow.

Type:

Straight ball valves

Guarantee:

25-year

Technical data/Operating parameters:

Max pressure: 4,0 MPa

Max temperature: 180°C

Used materials:

body, nut, ball, stem, union nut, union end piece, adjustable stem nut: brass;
ball and stem seal: PTFE (teflon);
lever: carbon steel with plastic coating

Finish:

body, nut: nickel; ball: chrome