


## Ball valves ONYX

Ball valve with nut on stem, with tail piece and steel lever

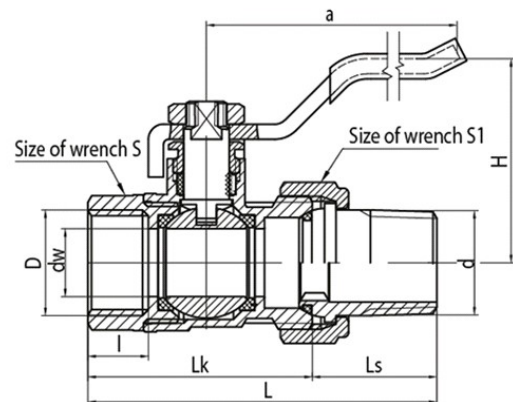

DN	Code	Dimensions											EAN13
		Size	D	I	dw	L	Lk	d	a	H	S	S1	
15	1452420	1/2"	G1/2	12	13,5	69	44,5	R1/2	90	42	25	30	5907451933169
20	1453420	3/4"	G3/4	12	18,5	77,5	55	R3/4	90	46	31	37	5907451933237
25	1454420	1"	G1	14,5	23,5	88,5	58,5	R1	110	50	38	46	5907451933305
32	1455420	1 1/4"	G1 1/4	15	30	103	72	R1 1/4	115	65	48	53	5902273570127

### Product usage:

Used as shut-off fittings in cold and hot water systems, in central heating and cooling systems (including solar systems) where the working medium is water or water / glycol solution (up to 50%), in compressed air installations

### Type:

Straight ball valves

### Technical data/Operating parameters:

Max pressure:  
DN15 - DN25: 4 MPa  
DN32: 3 MPa  
Max temperature:  
DN15 - DN25: 180°C  
DN32: 150°C

### Guarantee:

25-year

### Used materials:

body, nut, ball, stem, union nut, union end piece, adjustable stem nut: brass;  
ball and stem seal: PTFE (teflon);  
lever: carbon steel with plastic coating

### Finish:

body, nut: nickel; ball: chrome