


Connectors TWIST

Shot blasted straight connector with o-ring, tail piece

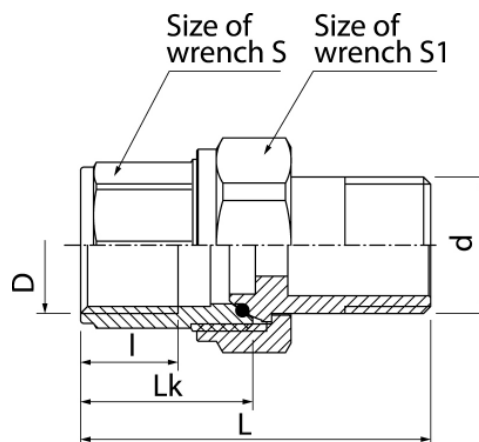

| DN | Code | Dimensions | | | | | | | | EAN13 |
|----|---------|------------|-------|------|----|----|----|----|----|---------------|
| | | Size | D | d | L | Lk | l | S | S1 | |
| 15 | 4912030 | 1/2" | Rp1/2 | R1/2 | 54 | 26 | 12 | 24 | 30 | 5907451904497 |
| 20 | 4913030 | 3/4" | Rp3/4 | R3/4 | 60 | 28 | 14 | 30 | 37 | 5907451905470 |
| 25 | 4914030 | 1" | Rp1 | R1 | 65 | 30 | 16 | 38 | 46 | 5907451905715 |

Product usage:

In the piping systems of cold and hot water and central heating for connecting pipes with each other or with any other part of the installation

Type:

Fittings

Technical data/Operating parameters:

Max pressure: 1,0 MPa,
Max temperature: 100°C

Guarantee:

25-year

Used materials:

body, nut, connector end piece: brass;
sealing: O-ring seal

Finish:

body, nut, connector
end piece: brass