


Connectors TWIST

Shot blasted reducing male nipple connector

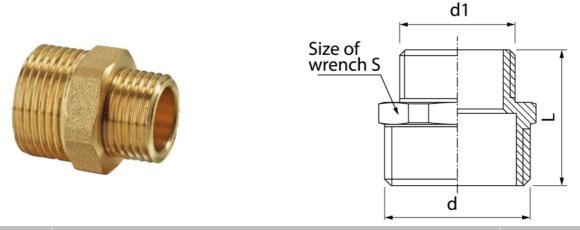

Code	Dimensions					EAN13
	Size	d	d1	L	S	LANIS
6031060	1/2"-3/8"	G1/2	G3/8	26	21	5907451945001
6032060	1/2"-3/4"	G3/4	G1/2	28,5	27	5907451945018
6033060	1/2"-1"	G1	G1/2	33	34	5907451945025
6034060	3/4"-1"	G1	G3/4	34	34	5907451945032

Product usage:

In the piping systems of cold and hot water and central heating for connecting pipes with each other or with any other part of the installation

Type:

Fittings

Guarantee:

25-year

Technical data/Operating parameters:

Max pressure: 1,0 MPa, Max temperature: 100°C

Used materials:

brass

Finish:

brass