


# Compact Mixing Shunt PROFF PLUS

# **Compact Mixing Shunt**

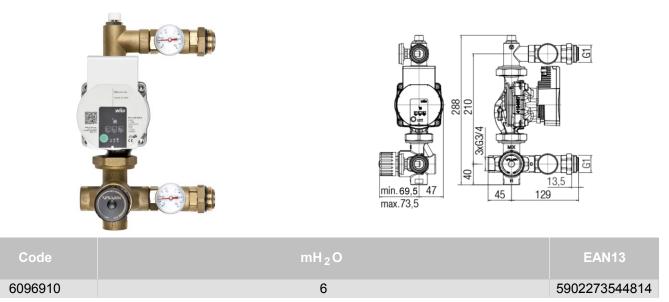

#### Product usage:

For use in central heating systems for controlling and maintaining constant temperature in heating manifolds

#### Type:

**Compact Mixing Shunt** 

### Guarantee:

2-year

## Technical data/Operating parameters:

Max pressure: 0,6 MPa, Max temperature: 70°C

### **Used materials:**

four-way thermostatic valve, 90° elbow, reducing connectors, fittings, tee connector: brass, seals: EPDM, manual purging valve, circulating pump: Wilo.

#### Finish:

four-way thermostatic valve, 90° elbow, reducing connectors, fittings, tee connector: brass; manual purging valve: nickel