


Ball valves OMAX

Full-port ball valve with nut on stem and steel lever (female-female version)

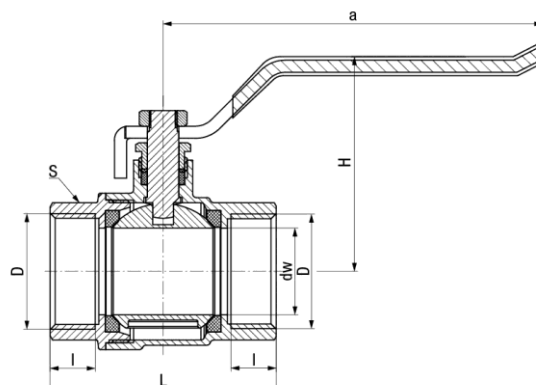

DN	Code	Dimensions								EAN13
		Size	D	l	dw	L	a	H	S	
15	1402200	1/2"	G1/2	12	15	48,5	90	45	25	5902273572008
20	1403200	3/4"	G3/4	11	20	56	90	49	31	5902273572015
25	1404200	1"	G1	13	25	65	110	55	37	5902273572022
32	1405200	1 1/4"	G1 1/4	15	30	76	115	64	46	5902273572039
40	1406200	1 1/2"	G1 1/2	16	37	87,5	140	79	53	5902273572046
50	1407200	2"	G2	16	45	98	140	85	65	5902273572053

Product usage:

Used as shut-off fittings in cold and hot water systems, in central heating systems (including solar systems) where the working medium is water or water / glycol solution (up to 50%)

Type:

Straight ball valves

Guarantee:

25-year

Technical data/Operating parameters:

Max pressure: 3,0 MPa

Max temperature: 150°C

Used materials:

body, nut, ball, stem, adjustable stem nut: brass;

ball and stem seal: PTFE (teflon);

lever: carbon steel with plastic coating

Finish:

body, nut: nickel; ball: chrome