


Ball valves OMAX

Ball valve with nut on stem, with tail piece and steel lever

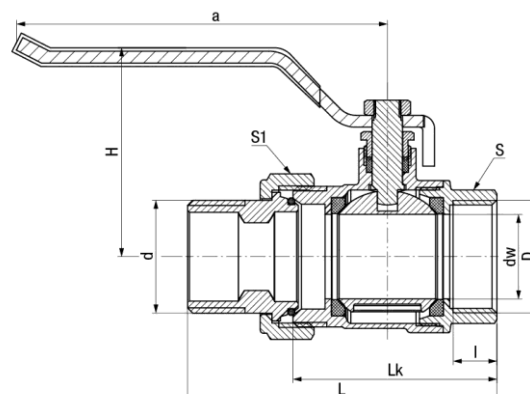

DN	Code	Dimensions											EAN13
		Size	D	I	dw	L	Lk	d	a	H	S	S1	
15	1402240	1/2"	G1/2	9,5	15	68	42,5	R1/2	90	45	25	30	5902273572091
20	1403240	3/4"	G3/4	11	20	80	51	R3/4	90	49	31	37	5902273572107
25	1404240	1"	G1	13	25	92	60,5	R1	110	55	37	46	5902273572114
32	1405240	1 1/4"	G1 1/4	15	30	103	72	R1 1/4	115	64	46	53	5902273572244

Product usage:

Used as shut-off fittings in cold and hot water systems, in central heating systems (including solar systems) where the working medium is water or water / glycol solution (up to 50%)

Type:

Straight ball valves

Technical data/Operating parameters:

Max pressure: 3,0 MPa

Max temperature: 150°C

Guarantee:

25-year

Used materials:

body, nut, ball, stem, union nut, union end piece, adjustable stem nut: brass;

ball and stem seal: PTFE (teflon);

lever: carbon steel with plastic coating

Finish:

body, nut: nickel; ball: chrome