


Ball valves OMAX

Full-port ball valve with nut on stem, with tail piece and aluminium butterfly handle

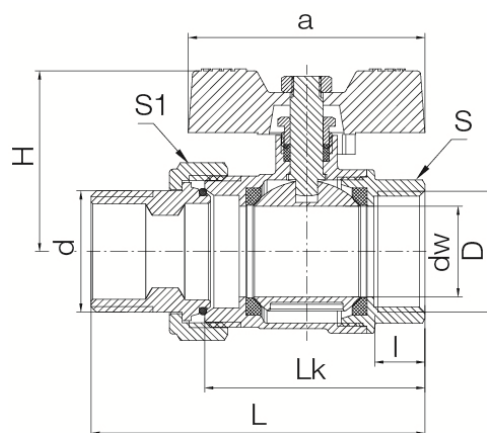

DN	Code	Dimensions											EAN13
		Size	D	I	dw	L	Lk	d	a	H	S	S1	
15	1402260	1/2"	G1/2	9,5	15	68	42,5	R1/2	51,5	37	25	30	5902273572121
20	1403260	3/4"	G3/4	11	20	80	51	R3/4	51,5	40,5	31	37	5902273572138
25	1404260	1"	G1	13	25	92	60,5	R1	65	50	37	46	5902273572145
32	1405260	1 1/4"	G1 1/4	15	30	103	72	R1 1/4	75	57	46	53	5902273572251

Product usage:

Used as shut-off fittings in cold and hot water systems, in central heating systems (including solar systems) where the working medium is water or water / glycol solution (up to 50%)

Type:

Straight ball valves

Guarantee:

25-year

Technical data/Operating parameters:

Max pressure: 3,0 MPa

Max temperature: 150°C

Used materials:

body, nut, ball, stem, union nut, union end piece,
adjustable stem nut: brass;

ball and stem seal: PTFE (teflon);

butterfly handle: aluminium alloy

Finish:

body, nut: nickel; ball: chrome