


Ball valves OMAX

Full-port ball valve with nut on stem and steel lever (female-male version)

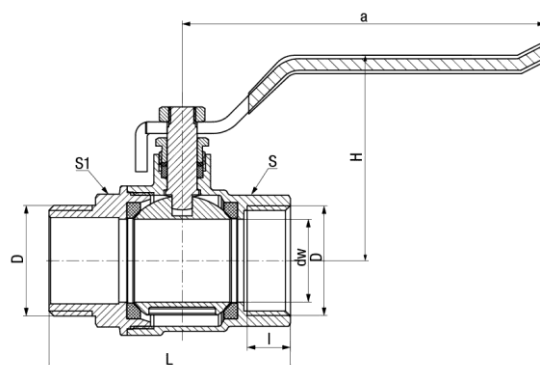

DN	Code	Dimensions									EAN13
		Size	D	I	dw	L	a	H	S	S1	
15	1402280	1/2"	G1/2	12	15	57,5	90	45	25	22	5902273572152
20	1403280	3/4"	G3/4	11	20	63	90	49	31	31	5902273572169
25	1404280	1"	G1	13	25	72,5	110	55	38	38	5902273572176
32	1405280	1 1/4"	G1 1/4	16,5	30	83,5	115	64	44	44	5902273572183
40	1406280	1 1/2"	G1 1/2	17,5	37	96,5	140	79	53	50	5902273572190
50	1407280	2"	G2	18	45	105,5	140	85	65	62	5902273572206

Product usage:

Used as shut-off fittings in cold and hot water systems, in central heating systems (including solar systems) where the working medium is water or water / glycol solution (up to 50%)

Type:

Straight ball valves

Guarantee:

25-year

Technical data/Operating parameters:

Max pressure: 3,0 MPa

Max temperature: 150°C

Used materials:

body, nut, ball, stem, adjustable stem nut: brass;

ball and stem seal: PTFE (teflon);

lever: carbon steel with plastic coating

Finish:

body, nut: nickel; ball: chrome