


Ball valves SPIN

Full-port ball valve with nut on stem, steel handle and rotary nut (female-female version)

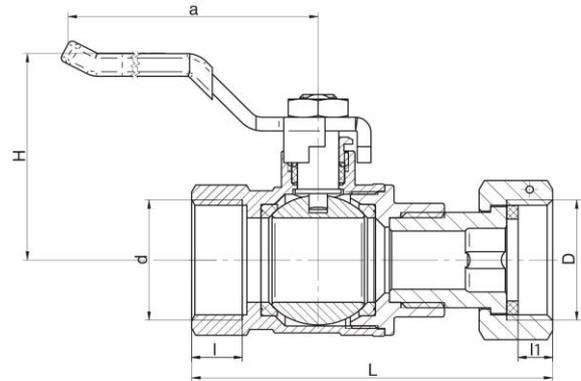

DN	Code	Dimensions								EAN13
		Size	D	d	L	l	l1	H	a	
15	1472900	G1/2-G1/2	G1/2	G1/2	65,5	10	6	42	90	5902273534761
15	1472940	G1/2-G3/4	G1/2	G3/4	71	10	7,5	42	90	5902273534723
15	1473900	G3/4-G3/4	G3/4	G3/4	78,5	11	7,5	46	90	5902273543817
20	1473940	G3/4-G1	G3/4	G1	79,5	11	7,5	46	90	5902273534747

Product usage:

In the water supply systems for hot and cold water, heating systems, systems with glycol water solution as shut-off valves to open and close the flow.

Type:

Straight ball valves

Technical data/Operating parameters:

Max pressure: 2,5 MPa,
Max temperature: 95°C

Guarantee:

25-year

Used materials:

body, nut, ball, stem, adjustable stem nut: brass;
ball and stem seal: PTFE (teflon);
lever: carbon steel with plastic coating
gasket: fibre

Finish:

body, nut: nickel; ball: chrome