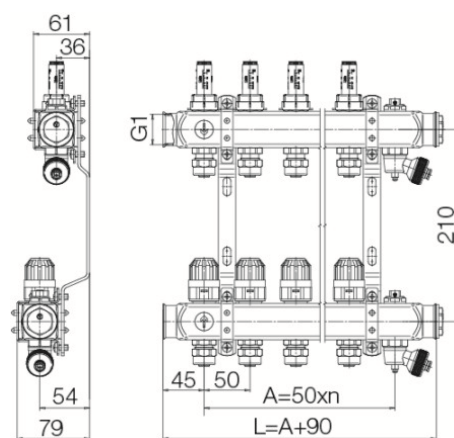
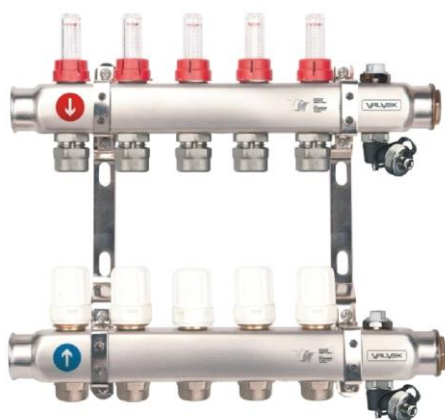


Manifold set BASE ECOLINE**Manifold set K5H-n PLUS G1"-PEX 16x2**

Code	Dimensions				EAN13
	Size	K(x)-n	A	L	
6078300	G1-PEX 16x2	K5H-2	100	190	5902273574866
6078310	G1-PEX 16x2	K5H-3	150	240	5902273574873
6078320	G1-PEX 16x2	K5H-4	200	290	5902273574880
6078330	G1-PEX 16x2	K5H-5	250	340	5902273574897
6078340	G1-PEX 16x2	K5H-6	300	390	5902273574903
6078350	G1-PEX 16x2	K5H-7	350	440	5902273574910
6078360	G1-PEX 16x2	K5H-8	400	490	5902273574927
6078370	G1-PEX 16x2	K5H-9	450	540	5902273574934
6078380	G1-PEX 16x2	K5H-10	500	590	5902273574941
6078390	G1-PEX 16x2	K5H-11	550	640	5902273574958
6078400	G1-PEX 16x2	K5H-12	600	690	5902273574965

Product usage:

For use in piping systems of cold and hot water and radiator and space central heating

Type:

Manifold set C.O.

Technical data/Operating parameters:

Max pressure: 0,6 MPa,

Max temperature: 70°C

Guarantee:

25-year

Used materials:

- steel manifold pipe G1 x 2 pcs
- bracket set x 2 pcs
- connection rings with O-ring 16x2-G1/2
- flow meter G1/2
- thermostatic valve G1/2
- manual purging valve
- rotary drain valve
- plug with O-rings G1 x 2 pcs

Finish:

manifold pipe, connection ring: stainless steel; plug: brass; bracket set: chrome